

## SHOWER STALL



48-INCH MODEL

**S-48** (Twin Seats)

60-INCH MODEL

**S-60** (Twin Seats)

Rough-In Dimensions	48	48" wide x 37-1/2" deep x 76-1/2" high (84-1/4" high w/cap)
	60	60" wide x 37-1/2" deep x 76-1/2" high (84-1/4" high w/cap)

Finished Dimensions	48	48" wide x 36" deep x 75" high (84" high w/cap)
	60	60" wide x 36" deep x 75" high (84" high w/cap)


## Unit Features

- One - Piece Gelcoated Fiberglass
- 3-3/8" Dia. Center Drain (see reverse side for location)
- Twin / Elevated Corner Shelves
- Twin / Contoured Corner Seats
- Textured Floor Pattern
- Balsa Wood "Anti-flex" Floor Construction

## Special Notes


- Unit Complies with ANSI Z 124 Series
- Unit Complies with HUD / FHA UM-73a (use of materials)
- Unit Cap Available (see reverse side for details)
- 48-inch Model Available in 3-Piece Version (see KDS-48 model)

## S-48

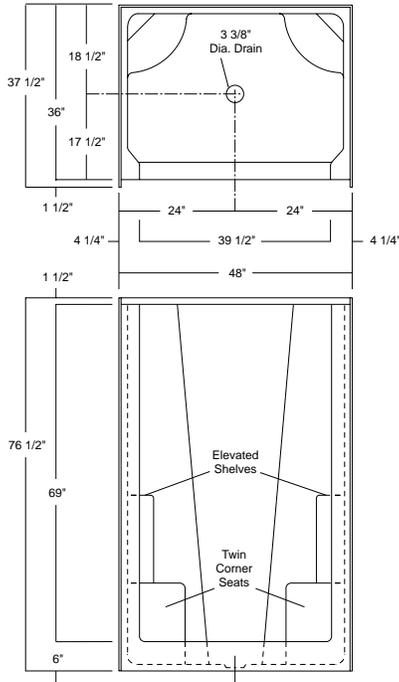

**Floor Area:** 1350 Sq. Inches (@ 24" above threshold)  
**Floor Area:** 1075 Sq. Inches (@ top of threshold)

## S-60

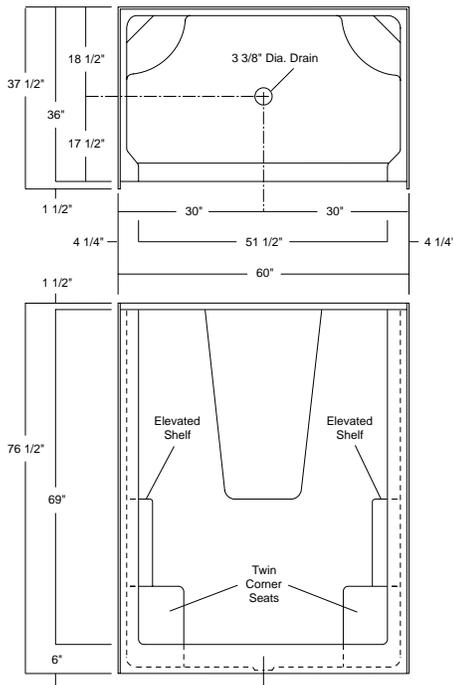

**Floor Area:** 1680 Sq. Inches (@ 24" above threshold)  
**Floor Area:** 1390 Sq. Inches (@ top of threshold)

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary. (Tolerances: +0/- 3/8 inch)

**48" Model:** S - 48

48" x 36", One-Piece, Gelcoated Fiberglass Shower with wall surround.

**60" Model:** S - 60

60" x 36", One-Piece, Gelcoated Fiberglass Shower with wall surround.

### Stall Accessories

**Order No.:** ENC-PVSH481-CH (*Chrome trim (S-48 only)*)  
 ENC-PVSH481-PB (*Polished Brass trim (S-48 only)*)

Custom fit, no trim shower enclosure with caulless wall channels, pivot door, obscure glass, and EZ Klean door track.

**Order No.:** CAP-48

48" x 36" x 9" high Gelcoated Fiberglass Cap for S-48 Model. (*Cap packaged separately*)

**Order No.:** CAP-S60

60" x 36" x 9" high Gelcoated Fiberglass Cap for S-60 Model. (*Cap packaged separately*)

**Order No.:** DMLGT (*Includes Field Installed Fixture*)

Factory applied reinforcement and 5-1/4" dia. hole cut in dome/cap, to accept UL Listed shower light. (*Light packaged separately*)

